


FEATURES & BENEFITS

- Automatic snow and ice melting control minimizes operating costs
- Rated for up to 30 amp resistive loads
- Integral 30mA of Ground Fault Equipment Protection (GFEP)
- Weather-resistant NEMA 4X enclosure
- UL Listed for Temperature Regulating Equipment
- Adjustable Hold-On timer continues heater operation after snow and ice stop to ensure complete melting
- Dual sensor capability to meet site performance requirements
- Automatic and manual-override operator controls for changing environmental conditions
- Optional remote control operation for added convenience

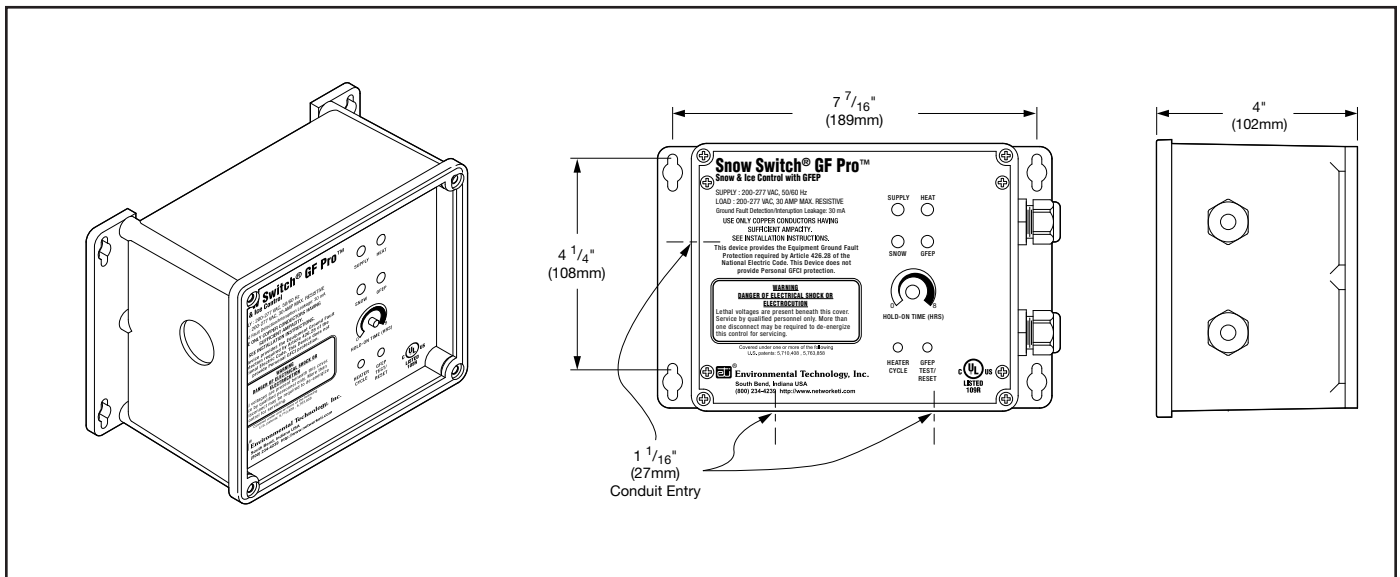

DESCRIPTION

The Snow Switch Model GF Pro is an automatic snow and ice melting control system. Utilizing standard Environmental Technology snow and ice sensors (sold separately), applications include snow and ice detection and melting for pavement, sidewalks, loading docks, roofs, gutters and downspouts in commercial and residential environments.

The GF Pro interfaces with up to two standard Environmental Technology sensors to meet site requirements. The CIT-1 sensor may be roof or mast mounted and can be paired with the GIT-1 sensor for gutter applications or the SIT-6E sensor for pavement applications. All three sensors detect precipitation as snow at temperatures below 38°F (3.3°C), saving energy

and ensuring thorough snow and ice melting. Since 1968, these sensors have been the industry's most versatile and cost-effective automatic snow melting control sensors.

The GF Pro features built-in 30mA, self-testing Ground Fault Equipment Protection (GFEP), digitally filtered to minimize false tripping. A ground fault condition must be manually reset using the Test/Reset switch before heater operation can continue.

The GF Pro uses both automatic and manual-override operator controls. The adjustable Hold-On timer continues heater operations up to 8 hours after snow or ice conditions end to ensure complete melting. The Heater Cycle control button allows manual initiation or cancellation of a heating cycle. The optional RCU-4 remote control unit can be located for convenient


monitoring and control. These flexible control options provide complete snow melting and water evaporation at a low operating cost.

The GF Pro weighs only 3 pounds and measures 5 1/2" (L) x 8 1/8" (W) x 4 3/8" (H). Comprehensive instruction manuals simplify installation and operation. These products are also supported by Environmental Technology Technical Support.

The GF Pro is a capable snow and ice control for medium-sized applications whose features and power requirements do not require an APS or EUR Series control panel. For complete information describing application, installation, and features, please contact Environmental Technology Customer Service or visit our website at networketi.com.

SPECIFICATIONS

General

Area of use	Nonhazardous locations
Approvals	 Type 873 Temperature Regulating Equipment <small>Also evaluated by Underwriters Laboratories Inc[®] in accordance with UL 1053 Ground-Fault Sensing and Relaying Equipment</small>

Enclosure

Protection	IP 66, NEMA 4X
Cover attachment	Polycarbonate with machine screws
Entries	2 x 3/4" entry (bottom right) for NEC Class 2 connections 3 x 1-1/16" entries (bottom left) for supply and load power
Material	Polycarbonate
Mounting	Wall mount
Dimensions	5 1/2" (L) x 8 1/8" (W) x 4 3/8" (H) / 140mm (L) x 207mm (W) x 112mm (H)

Control

Supply voltage	200 - 277 VAC; 50/60 Hz
Load	30 amp maximum resistive
Contact type	2 Form A
Weight	3 Pounds (not including sensors)
Maximum ratings	Voltage: 277 VAC Current: 30 amps
Heater Hold-On timer	0 to 8 hours; actuated by snow stopping or toggle switch
System test	Switch toggles heater contact on and off. If temperature exceeds optional high limit thermistor (45°F), heater shuts off to reduce costs and prevent damage.

Front Panel Interface

Status indicator	SUPPLY (green): Power on HEAT (yellow): Heating cycle in progress SNOW (yellow): Sensor(s) detect snow GFEP (red): Ground Fault condition GFEP (red, flashing): Failed GFEP (red, rapid flashing): GFEP test in progress
------------------	---

Snow/Ice Sensors

Maximum quantity	2 ETI sensors
Circuit type	NEC Class 2
Lead length	Up to 500' (152m) using 18 AWG 3-wire jacketed cable Up to 2,000' (609m) using 12 AWG 3-wire jacketed cable

Wire and Cable Ratings

Power cable	Size for heater load (30 amps maximum)
Sensor wiring	#18 AWG jacketed, 3-conductor
Heater cable	Size for maximum heater load
Remote wiring	#22 AWG jacketed, 2-conductor

Ground Fault Equipment Protection (GFEP)

Set point	30mA
Automatic self-test	GFEP verified before contactors operate; GFEP runs on start-up and every 24 hours
Manual Test/Reset	Test/Reset switch on front panel

Environmental

Operating temperature	-31°F to 130°F (-35°C to 55°C)
Storage temperature	-67°F to 167°F (-55°C to 75°C)

ORDERING INFORMATION

Order Number	Description
23917	GF Pro
23918	GF Pro Installation and Operations Manual
Accessories	
21358	RCU-4 Remote Control (Optional)
19272	High Temperature Sensor w/ 20' (6m) lead (Optional)
Snow/Ice Sensors (Not Included)	
10001	CIT-1 Aerial Snow Sensor
11351	GIT-1 Gutter Ice Sensor
20756	SIT-6E Pavement Mounted Snow and Ice Sensor

LIMITED WARRANTY

ETI's two year limited warranty covering defects in workmanship and materials applies. Contact Customer Service for complete warranty information.

DISCLAIMER

Environmental Technology, Inc. makes no representations or warranties, either expressed or implied, with respect to the contents of this publication or the products that it describes, and **specifically disclaims any implied warranties of merchantability or fitness for any particular purpose**. Environmental Technology, Inc. reserves the right to revise this publication, and to make changes and improvements to the products described in this publication, without the obligation of Environmental Technology, Inc. to notify any person or organization of such revisions, changes or improvements.

The ETI logo, Snow Switch, We Manage Heat, CIT, GIT, and SIT are registered trademarks of Environmental Technology, Inc.
PD Pro and RCU are trademarks of Environmental Technology, Inc.
Copyright © 2012 Environmental Technology, Inc. All rights reserved.